




## EUROPEAN QUALITY

### Quality

- / BIPV - Architectural integration
- / Subjected to test electroluminescence
- / IP65 + 1 m cable
- / High transmissivity glass and high resistance
- / Friendly environment & recyclable materials

### Certificates

- / IEC 61215:2005
- / IEC 61730-1:2004 / IEC 61730-2:2004
- / Frontal load (snow) 5.400 Pa
- / Back load (wind) 2.400 Pa
- / Fire Resistance Certificate / Class II (under standard UNI 9177)
- / MCS (UK)
- / EE016-20130528-001 (France)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA)

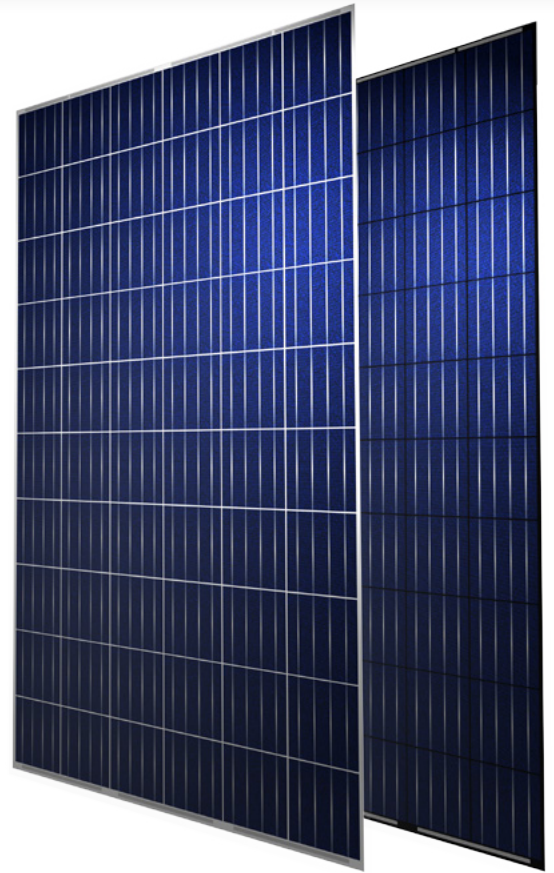

**TOTAL 60**  
+15 YEARS WARRANTY  
+20 YEARS EXPERIENCE  
+25 YEARS PERFORMANCE

**+3%**

Extra power  
extra up to 3%  
extra up to 7W

PHOTON Laboratory talks about our modules:

*"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997. [...] Is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements".*



## PEPV Frameless - Polycrystalline



Standard - All Black / 250 / 255 / 260 / 265 / 270 W

20 years of experience  
12 years warranty product

**eurener**  
energía solar

### Technical features

<b>BIPV - Eurener® Architectural Integration</b> Frameless PV module for building integration
Connection box
Sealed, robust and wide for heat dissipation
IP65 according to IEC 60529
Diodes by-pass built-in (3) for protection of the partial shading
Connector MC4 or compatible, easy and rapid connection
Cables 1 meter length and 4mm <sup>2</sup> section
Reaction to Fire Class II (conformity to UNI 9177 norm)
<b>Frontal</b>
3,2 mm tempered glass
Textured, extra-clear with low iron content
<b>Solar cells</b>
60 cells polycrystalline silicon / 156x156 mm
<b>Weight and dimensions</b> (L x W) +/-1% mm
18,5 Kg   1634 x 986 x mm

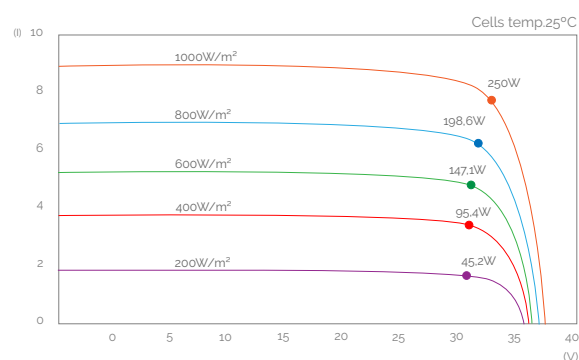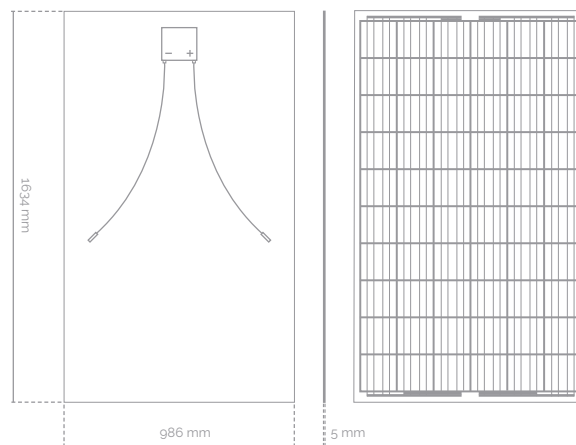

### Electric data

Standard	PEPV 250 - NF	PEPV 255 - NF	PEPV 260 - NF	PEPV 265 - NF	PEPV 270 - NF
Nominal power, P <sub>mpp</sub>	250 W	255 W	260 W	265 W	270 W
Tolerance, P <sub>mpp</sub>	0 / +3%	0 / +3%	0 / +3%	0 / +3%	0 / +3%
Area of the module	1,61				
Module efficiency	15,53%	15,84%	16,15%	16,46%	16,77%
I <sub>sc</sub>	8,69 A	8,76 A	8,82 A	8,98 A	9,12 A
U <sub>oc</sub>	37,83 V	37,94 V	38,10 V	38,40 V	39,22 V
I <sub>mpp</sub>	8,17 A	8,37 A	8,47 A	8,56 A	8,61 A
U <sub>mpp</sub>	30,60 V	30,47 V	30,70 V	30,96 V	31,36 V
Maximum voltage	1000 V				
α I <sub>sc</sub>	0,039% / °C				
β U <sub>oc</sub>	- 0,29% / °C				
γ P <sub>max</sub>	- 0,42% / °C				
Temperature range	- 40°C to +85°C				
NOCT	44°C ± 2°C				

NOTE: Read the instruction manual of this product and follow the indications. Values are valid for: 1000W/m<sup>2</sup>, AM 1.5 and cell's temperature of 25°C. All the information of this brochure may be amended without notice by Eurener.