




## EUROPEAN QUALITY

### Quality

- / BIPV - Architectural integration - Translucent Backsheet
- / Subjected to test electroluminescence
- / IP65 + 1 m cable
- / High transmissivity glass and high resistance
- / Frame with higher mechanical strength and air chamber
- / Friendly environment & recyclable materials

### Certificates

- / IEC 61215:2005
- / IEC 61730-1:2004 / IEC 61730-2:2004
- / Frontal load (snow) 5.400 Pa
- / Back load (wind) 2.400 Pa
- / Fire Resistance Certificate / Class II (under standard UNI 9177)
- / MCS (UK)
- / EE016-20130528-001 (France)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA)

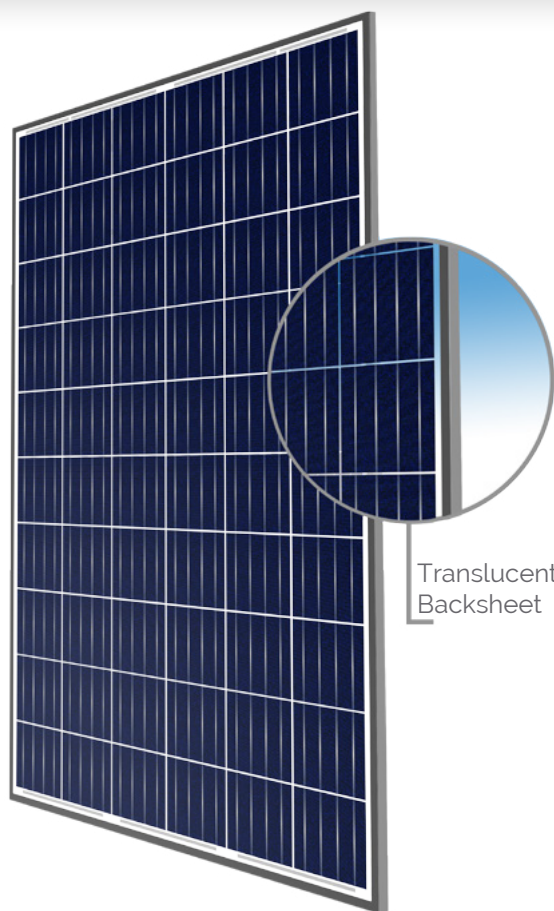

Translucent Backsheet

**TOTAL 60**  
+15 YEARS WARRANTY  
+20 YEARS EXPERIENCE  
+25 YEARS PERFORMANCE

**+3%**

Extra power  
extra up to 3%  
extra up to 7W

PHOTON Laboratory talks about our modules:

*"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997. [...] Is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements".*



# Clear - Monocrystalline

CEPV 250 / 255 / 260 / 270 W

20 years of experience



15 years warranty product

**eurener**  
energía solar



### Technical features

Frame
Silver anodized aluminium 0,015 mm
Robust and resistant to corrosion
Built-in plug
Connection box
Sealed, robust and wide for heat dissipation
IP65 according to IEC 60529
Diodes by-pass built-in (3) for protection of the partial shading
Connector MC4 or compatible, easy and rapid connection
Cables 1 meter length and 4mm <sup>2</sup> section
Reaction to Fire Class II (conformity to UNI 9177 norm)
Frontal
3,2 mm tempered glass
Textured, extra-clear with low iron content
Solar cells
60 cells monocrystalline silicon / 156x156 mm
Weight and dimensions (L x W) +/-1% mm
20 Kg   1640/50 x 992 x 35/40 mm

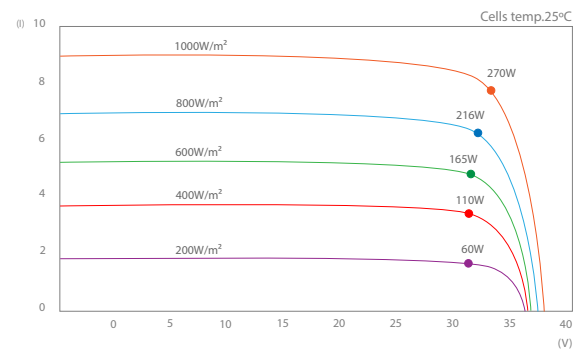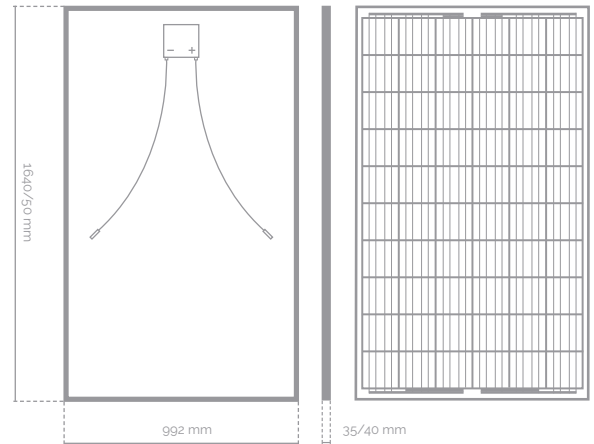

### Electric data

CEPV	MEPV 250 - C	MEPV 255 - C	MEPV 260 - C	MEPV 270 - C
Nominal power, P <sub>mp</sub>	250 W	255 W	260 W	270 W
Tolerance, P <sub>mp</sub>	0 / +3%	0 / +3%	0 / +3%	0 / +3%
Area of the module	1,62			
Module efficiency	15,43%	15,74%	16,05%	16,67%
I <sub>sc</sub>	8,70 A	8,73 A	8,77 A	8,89 A
U <sub>oc</sub>	37,47 V	38,12 V	38,34 V	38,96 V
I <sub>mp</sub>	8,30 A	8,35 A	8,47 A	8,74 A
U <sub>mp</sub>	30,12 V	30,54 V	30,70 V	30,89 V
Maximum voltage	1000 V			
α I <sub>sc</sub>	0,039% / °C			
β U <sub>oc</sub>	- 0,29% / °C			
γ P <sub>max</sub>	- 0,42% / °C			
Temperature range	- 40°C to +85°C			
NOCT	44°C ± 2°C			

NOTE: Read the instruction manual of this product and follow the indications. Values are valid for: 1000W/m<sup>2</sup>, AM 1.5 and cell's temperature of 25°C. All the information of this brochure may be amended without notice by Eurener.