

Monocrystalline Photovoltaic Module »




# MEPV 120 HALF-CUT

BLACK - STANDARD - BICOLOUR »  
330 / 340 Wp

## QUALITY »



**120 cells**  
Half-Cut monocrystalline



**MBB technology**  
Better light absorption



**Fire resistance**  
Maximum protection




**+5W**  
Positive power tolerance



**Avoid losses**  
Better shading tolerance



**Optimal performance**  
Power and efficiency

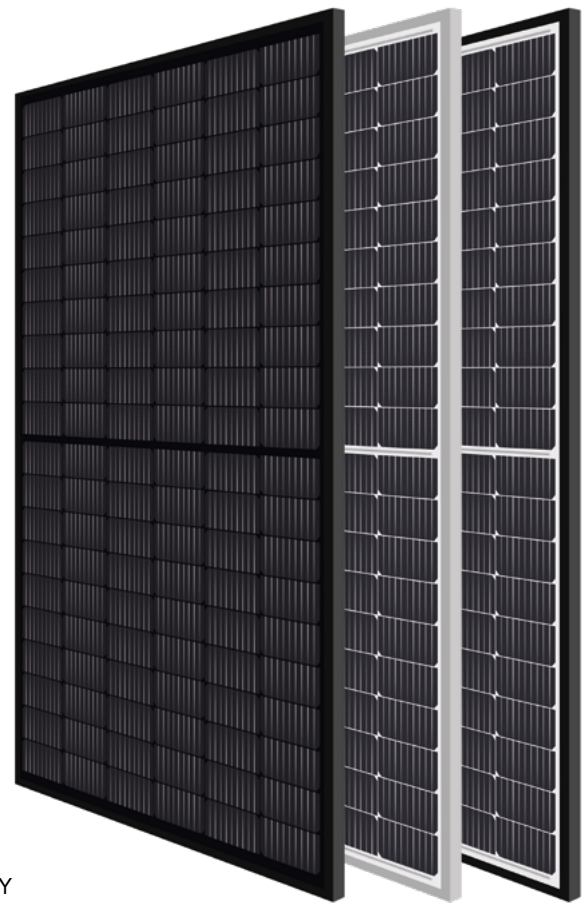

## WARRANTIES »

**15 YEARS PRODUCT WARRANTY**

**25 YEARS PERFORMANCE WARRANTY**  
Linear Warranty

**PRODUCT WARRANTY**  
for Premium Partners

**+5**  
YEARS

## CERTIFICATES »



## TECHNICAL FEATURES »

### Eurener\_MEPV 120\_HALF-CUT\_330-340Wp\_2022EN

#### FRAME

Black / Silver anodized aluminium

Robust and resistant to corrosion

#### CONNECTION BOX AND PROTECTIONS

Sealed, robust and wide for heat dissipation

IP67/IP68 according to IEC 60529

Diodes by-pass built-in (3/6)

Connector MC4 compatible

Application Class A. Safety Class II

Cables 1000 mm ( $\pm 20\%$ ) length and 4 mm<sup>2</sup> section

#### FRONTAL

3,2 mm thick tempered glass with high strength and ARC

Textured, extra-clear with low iron content



Frontal load (snow) 5.400 Pa | Back load (wind) 2.400 Pa

#### SOLAR CELLS

120 [2x(10x6)] cells monocrystalline silicon

#### WEIGHT, DIMENSIONS AND PACKAGING

18 Kg | 1684 x 1002 x 35 mm ( $\pm 1\%$ ) | Pack: 858 pcs-truck

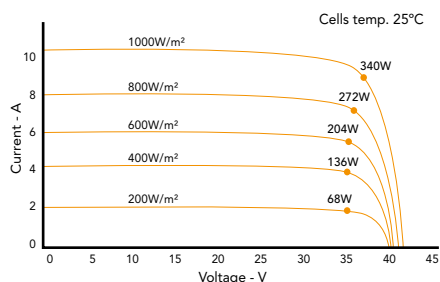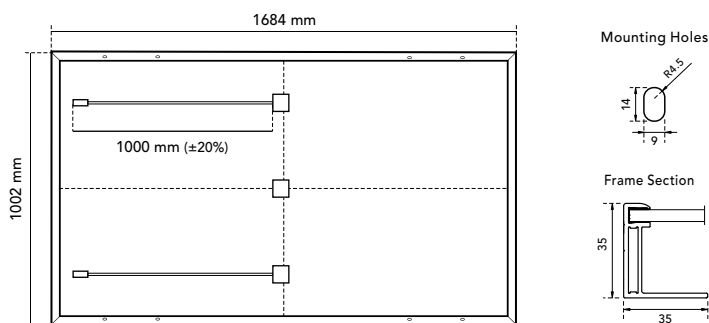

## ELECTRIC DATA »

BLACK - STANDARD - BICOLOUR	MEPV 330	MEPV 340
STC: 1000 W/m <sup>2</sup> , module temperature 25°C, AM 1,5		
Nominal power. P <sub>mpp</sub>	330 Wp	340 Wp
Tolerance. P <sub>mpp</sub>	0 / +5 W	0 / +5 W
Area of the module	1,68 m <sup>2</sup>	
Module efficiency	19,58 %	20,16 %
I <sub>sc</sub>	10,14 A	10,26 A
V <sub>oc</sub>	42,20 V	43,00 V
I <sub>mp</sub>	9,63 A	9,75 A
V <sub>mp</sub>	34,30 V	34,90 V
NOCT: 800 W/m <sup>2</sup> , ambient temperature 20°C, AM 1,5		
Nominal power. P <sub>mpp</sub>	249,93 W	257,52 W
I <sub>sc</sub>	8,16 A	7,68 A
V <sub>oc</sub>	39,90 V	40,60 V
I <sub>mp</sub>	7,69 A	7,78 A
V <sub>mp</sub>	32,50 V	33,10 V
Operating parameters. Temperature coefficients		
Maximum voltage	1000 - 1500 V	
Maximum series fuse rating. I <sub>r</sub>	20 A	
$\alpha$ I <sub>sc</sub>	0,04 % / °C	
$\beta$ V <sub>oc</sub>	- 0,26 % / °C	
$\gamma$ P <sub>max</sub>	- 0,36 % / °C	
Temperature range	- 40°C ~ + 85 °C	
NOCT	41 $\pm$ 3 °C	

NOTE: Read the instruction manual of this product and follow the indications STC. Values are valid for: 1000W/m<sup>2</sup>, AM 1,5 and cells temperature of 25°C. Measurement tolerance  $\pm 3\%$  (AAA Solar simulation -IEC 60.904-9-). All the information of this brochure may be amended without notice by Eurener. Eurener\_MEPV 120\_HALF-CUT\_330-340Wp\_EN\_MAR2022

1997 to 2022  
**25**  
TH  
ANNIVERSARY

[www.eurenergroupp.com](http://www.eurenergroupp.com)  
contact@eurenerworld.com  
+34 960 045 515  
Calle Colón, 1-23  
46004, Valencia, Spain

## 25 years manufacturing a better world

Since 1997 our main purpose has been to supply quality and long-lasting photovoltaic modules that allow us and future generations, to continue generating clean energy to take care of our planet.